

08-21-00

A

Case Docket No. 1085/37870/18

BOX: NEW PATENT APPLICATION  
ASSISTANT COMMISSIONER FOR PATENTS  
Washington, D.C. 20231

Jc 886 U.S. PTO

09/642538



## CERTIFICATE OF MAILING BY "EXPRESS MAIL"

MAILING LABEL NUMBER FL557600282US

DATE OF DEPOSIT August 18, 2000

I HEREBY CERTIFY THAT THIS PAPER OR FEE IS BEING DEPOSITED WITH THE UNITED STATES POSTAL SERVICE "EXPRESS MAIL POST OFFICE BOX ADDRESS" SERVICE UNDER 39 CFR 1.10 ON THE DATE INDICATED ABOVE AND IS ADDRESSED TO THE ASSISTANT COMMISSIONER FOR PATENTS, WASHINGTON, D.C. 20231

*Jennifer L. Soukup*  
Jennifer L. Soukup

Submitted herewith for filing is the patent application of

For:

Jeffrey R. Kaufman  
Victor Salmons  
Steven P. King  
Bruce N. Alleshouse  
Bret M. Anno

PRINTER FOR PRINTING LABELS, TAGS OR THE LIKE

Enclosed are:

- ☒ Eight (8) Formal Sheets of Drawings.  
☒ An unexecuted DECLARATION AND POWER OF ATTORNEY (2 pages) for Patent Application.

The filing fee has been calculated as shown below:

	(Col. 1)	(Col. 2)
FOR:	NO. FILED	NO. EXTRA
BASIC FEE		
TOTAL CLAIMS	24 - 20 =	* 4
INDEP. CLAIMS	7 - 3 =	* 4
<input type="checkbox"/> MULTIPLE DEPENDENT CLAIM PRESENTED		

\*If the difference in Col. 1 is less than zero, enter "0" in Col. 2

## SMALL ENTITY

RATE	FEE
	\$ 345.00
x 9 =	\$ .00
x 39 =	\$
+130 =	\$
TOTAL	\$ .00

## OTHER THAN A SMALL ENTITY

RATE	FEE
	\$ 690.00
x 18 =	72.00
x 78 =	312.00
+ 260 =	.00
TOTAL	\$1074.00

- ☐ Please charge my Deposit Account No. 20-1495 in the amount of \$\_\_\_\_\_.  
A duplicate copy of this sheet is enclosed.
- ☒ A check in the amount of \$ 1074.00 to cover the filing fee is enclosed.
- ☒ The Commissioner is hereby authorized to charge payment of the following fees associated with this communication or credit any overpayment to Deposit Account No. 20-1495. A duplicate copy of this sheet is enclosed.
- ☒ Any additional filing fees required under 37 CFR 1.16.
- ☒ Any patent application processing fees under 37 CFR 1.17.
- ☒ The Commissioner is hereby authorized to charge payment of the following fees during the pendency of this application or credit any overpayment to Deposit Account No. 20-1495. A duplicate copy of this sheet is enclosed.
- ☒ Any patent application processing fees under 37 CFR 1.17.
- ☐ The issue fee set in 37 CFR 1.18 at or before mailing of the Notice of Allowance, pursuant to 37 CFR 1.311(b).
- ☒ Any filing fees required under 37 CFR 1.16 for the presentation of extra claims.

Dated: August 18, 2000

*James R. Foley*  
James R. Foley, Reg. No. 39,979  
Attorney of Record

CERTIFICATE OF MAILING BY "EXPRESS MAIL"

MAILING LABEL NUMBER EL557600262US

DATE OF DEPOSIT August 18, 2000

I HEREBY CERTIFY THAT THIS PAPER OR FEE IS BEING DEPOSITED WITH THE UNITED STATES POSTAL SERVICE "EXPRESS MAIL POST OFFICE BOX ADDRESSEE" SERVICE UNDER 35 CFR 1.10 ON THE DATE INDICATED ABOVE AND IS ADDRESSED TO THE ASSISTANT COMMISSIONER FOR PATENTS, WASHINGTON, D.C. 20231

*Jennifer L. Soukup*  
Jennifer L. Soukup

PATENT

Atty. Docket No.  
1085/37870

PRINTER FOR PRINTING LABELS, TAGS OR THE LIKE

**Inventors**

Jeffrey R. Kaufman  
465 Stevenson Place  
Vernon Hills, Illinois 60061  
A citizen of the United States of America

Victor Salmons  
1570 Belle Plaine  
Gurnee, Illinois 60031  
A citizen of the United States of America

Steven P. King  
121 W. King George Court  
Palatine, Illinois 60067  
A citizen of the United States of America

Bruce N. Alleshouse  
1426 Forest Avenue  
Wilmette, Illinois 60091  
A citizen of the United States of America

Bret M. Anno  
226 Chandler Drive  
Mundelein, Illinois 60060  
A citizen of the United States of America

### **Related Application**

This application claims the benefit of United States Provisional Application No. 60/149,966, filed August 20, 1999 and United States Provisional Application No. 60/162,789, filed October 29, 1999.

5

### **Background**

The present invention relates generally to printers which are configured to print labels, tags or the like, and more specifically relates to a printer which is configured to print labels, tags or the like and provides  
10 many advantages over the prior art.

It is advantageous to prevent printer downtime, or at least keep downtime to a minimum. Oftentimes, printers which print labels, tags or the like, such as barcode printers, are used in mission-critical applications. In such circumstances, when a printer goes down, it can be quite costly. For  
15 example, if a printer configured to print shipping labels runs out of ribbon or otherwise becomes effectively non-functional, it is possible that several hundred boxes will be placed into inventory without identification. In this case, every hour that the system or printer is unavailable can cost hundreds of thousands of dollars or more in lost productivity. Hence, it is  
20 advantageous to prevent printer downtime, and in mission-critical

applications, it is generally economically imperative.

Prior art printers are not configured to automatically notify someone, such as an Information Technology (IT) manager who may not be located in close proximity to the printer, when there is a problem. As such, to keep  
5      downtime to a minimum, it is imperative to continually monitor a printer on site, and even then downtime may be substantial. For example, in the case where there is an assembly line with an industrial barcode printer at the end of the assembly line, and the ribbon of the printer runs out, the operators on the assembly line may or may not notice right away that the printer has run  
10     out of ribbon. Once the problem has finally been detected, it may take awhile for the new ribbon to be located and installed in the printer, resulting in substantial downtime for the assembly line.

Some prior art printers have a web-server therein which provides that an IT manager can remotely view a web page that contains some basic  
15     information about the printer. However, these prior art printers do not provide for the unsolicited transmission of critical and non-critical printer data and the routing of that data through a plurality of communication channels to an IT manager. For example, these printers do not automatically send important printer data to an IT manager via e-mail, an  
20     Internet-ready pager, a Personal Communications Service (PCS) phone or a

wireless Personal Digital Assistant (PDA), thereby enabling the IT manager to respond to a problem or potential problem immediately, even though the IT manager may not have been actively monitoring the printer at the time. Instead, printers which have a web server therein are configured such that the IT manager must pro-actively monitor the printer and use a device which supports JAVA, such as a personal computer, to check on the status of the printer. Furthermore, even if a problem is detected by the IT manager in this manner, these printers do not provide that the IT manager can thereafter correct the problem by remotely interfacing with the printer. For example, prior art printers also do not provide that an IT manager can remotely access and modify a program which is operating within a printer's operating system. Therefore, if a change needs to be made to the program, the IT manager must access the program in the printer on site, using a computer connected to the printer's serial or parallel port, and this process must be repeated for each printer which the IT manager wants to re-program.

Still further, prior art printers do not provide that an IT manager can view and modify a label format from a remote location. Printers which are adapted to print labels, tags and the like, do so according to a pre-determined, pre-programmed format. For example, a printer which is

5 configured to print shipping labels may be configured to print a shipping label in a format wherein the shipping company's logo, name and address is printed in the upper, left-hand corner of the label and the receiving company's name and address is printed at the center of the label. If the format of the label is to be changed (for example, if the shipping company's

10 logo or address has changed), the IT manager must change the label format on site. After changing the label format, the IT manager typically has the printer print a label to determine whether the label looks acceptable. If not, the IT manager changes the format again, and has the printer print another label. This trial and error process may have to be repeated several times

15 and may take a substantial amount of time. Additionally, if the IT manager wants to change the label format for several printers, the IT manager must repeat the process for each printer.

Presently, there are many different barcode standards being used. Additionally, sometimes a barcode standard is changed (i.e. updated). Prior art barcode printers are configured such that an IT manager cannot remotely download a new or updated barcode rendering algorithm into the printer.

5 Instead, prior art printers are typically sold having one or more barcode rendering algorithms resident therein and, in order to add or update a barcode rendering algorithm, an IT manager must obtain the necessary software, and load the new or updated barcode rendering algorithm into the printer on site, using a computer connected to the printer's serial or parallel  
10 port, and this process must be repeated for each printer. Additionally, prior art printers are not configured such that an IT manager can download a barcode rendering algorithm, such as from a printer manufacturer's web site, and thereafter download the barcode rendering algorithm to one or more printers.

15 Finally, prior art printers are not configured such that an IT manager can remotely access (i.e. upload) the settings of a printer, change the printer settings, and download the new printer settings to the printer or to other printers. Hence, the printer settings of prior art printers cannot be modified remotely, and prior art printers are not configured such that they can be  
20 cloned (i.e. to contain the same printer settings) quickly and easily from a

remote location.

### **Objects and Summary**

5 An object of the present invention is to provide a printer which is configured to automatically transmit data, such as critical and non-critical printer data, and route that data through at least one of a plurality of communication channels and services, such as via e-mail or mobile wireless equipment (e.g. an Internet-ready pager, a Personal Communications Service (PCS) phone or a wireless Personal Digital Assistant (PDA)).

10 Another object of the present invention is to provide a printer which is configured such that it can be programmed and controlled from a remote location.

Still another object of the present invention is to provide a printer which is configured such that new label formats can be added from a remote location and label formats stored in the printer can be viewed and modified from a remote location.

15

A still yet other object of the present invention is to provide a printer which is configured such that barcode rendering algorithms can be downloaded to the printer.

20



A still yet further object of the present invention is to provide a printer which is configured such that printer settings can be viewed and modified from a remote location, and thereafter can be downloaded to the printer and/or to other printers in a network.

- 5 Briefly, and in accordance with at least one of the foregoing objects, an embodiment of the present invention provides a printer which is configured to print labels, tags or the like, where the printer includes a housing and electronics in the housing configured to determine a condition of the printer (such as a printer error or warning condition) and thereafter
- 10 automatically transmit data corresponding to the condition to a remote location, such as over an Intranet, the Internet and/or over a wireless communication network. Preferably, the printer transmits the data via e-mail, to an Internet-ready paging device, to a Personal Communications Service (PCS) phone and/or to a Personal Digital Assistant (PDA). By
- 15 providing that the printer automatically transmits printer data, an IT manager can be alerted to a problem (i.e. warning condition or printer error) in the printer, and the IT manager can immediately take steps to correct the problem. Preferably, the printer is configured such that at least some problems can be corrected by the IT manager from the remote location by
- 20 interfacing with the printer. However, some problems may require on site

correction (such as if the printer is out of paper).

Preferably, the printer is programmable and controllable from a remote location over an Intranet, the Internet and/or over a wireless communication network. Preferably, the settings of the printer can be viewed and modified in this manner. Ideally, the printer is programmable and controllable using a web browser on a personal computer connected to an Intranet or to the Internet, and is configured to display web pages on a mobile device, such as a PDA or PCS phone.

Furthermore, preferably a label format which is stored in the printer can be viewed and modified from a remote location. Additionally, preferably the printer is configured such that a barcode rendering algorithm can be downloaded to the printer, preferably in the form of executable code.

Desirably, the printer is configured such it can control one or more peripheral devices in a stand-alone operation and acquire data, and can thereafter, without solicitation from a host, upload the data to the host (when the host is ready to receive the data) via e-mail or TCP/UDP Messaging. Preferably, the data is assembled into one or more databases and processed by the host in other applications.

Preferably, the printer is configured to transmit its settings to a

remote location in XML format so that the printer settings are easy to read and are viewable using, for example, a web browser on a personal computer connected to the Intranet or the Internet. Thereafter, the settings can be modified and downloaded back to the printer, or can be downloaded to other printers in order to facilitate cloning. Preferably, the printer 10 is (and the other printers in the cloning process) are configured such that it parses out the data from the XML and re-sets its settings in accordance with the data which is parsed out of the XML.

10

### **Brief Description of the Drawings**

The organization and manner of the structure and function of the invention, together with further objects and advantages thereof, may be understood by reference to the following description taken in connection  
5 with the accompanying drawings, wherein:

FIGURE 1 is a perspective view of a printer which is in accordance with an embodiment of the present invention;

FIGURE 2 is a schematic diagram of electronics of the printer shown in FIGURE 1;

10 FIGURE 3 is a diagram showing the printer of FIGURE 1 interfaced with a personal computer at a remote location and interfaced with several mobile wireless devices, including an Internet-ready pager, a PCS phone and a PDA;

FIGURE 4 is a schematic diagram showing a user uploading the  
15 settings of the printer of FIGURE 1, viewing and modifying the settings using, for example, a web browser, and thereafter downloading the settings back to the printer, or to other printers in the network to facilitate cloning;

FIGURE 5 is a diagram showing a user uploading, modifying and downloading ZBI, and running/stopping ZBI from a remote location;

FIGURE 6 is a block diagram of a process wherein a user uploads a program which is stored in the printer which the printer uses to print a label, views and modifies the program, and views how the label would look if it were printed and/or prints out the label, and downloads the modified program back to the printer;

FIGURE 7 is a diagram showing the printer of FIGURE 1 connected to a host computer, and showing the printer uploading data to the host; and

FIGURE 8 is a diagram showing a user downloading barcode rendering algorithms from a web site, such as the web site of a printer manufacturer, and thereafter downloading the barcode rendering algorithms to several printers.

## **Description**

While the present invention may be susceptible to embodiment in different forms, there is shown in the drawings, and herein will be described in detail, an embodiment of the invention with the understanding that the present description is to be considered an exemplification of the principles of the invention and is not intended to limit the invention to that as illustrated and described herein.

FIGURE 1 depicts a printer 10 in accordance with an embodiment of the present invention. As will be described in more detail hereinbelow, the printer 10 provides many advantages over the prior art. For example, as will be described, preferably the printer 10 is configured to automatically transmit data, such as critical and non-critical printer data, and route that data through at least one of a plurality of communication channels and services, such as via e-mail or mobile wireless equipment (e.g. an Internet-ready pager, a Personal Communications Service (PCS) phone or a wireless Personal Digital Assistant (PDA)). As such, a person, such as an IT manager, can remain apprised of the condition of the printer 10 without having to pro-actively monitor the printer 10.

Preferably, the printer 10 can also be programmed and controlled from a remote location and label formats stored therein can be viewed and modified from a remote location. Still further, the printer 10 is preferably configured such that barcode rendering algorithms can be downloaded to the printer, and printer settings can be viewed and modified from a remote location. Thereafter, the printer settings can be downloaded to the printer 10, or the printer settings can be downloaded to other printers in a network to facilitate cloning.

As shown in FIGURE 2 which illustrates electronics 20 of the printer 10, the printer 10 includes a label generation and communications microprocessor 30 which communicates with a parallel port 40 and a serial port 50. Of course, other ports may also be provided on the printer 10 and these other ports may also be in communication with the label generation and communications microprocessor 30. As shown, a printserver 60 can be interfaced with the parallel port 40, and the printserver 60 may be connected to an Ethernet network 70 or some other type of network, which is thereafter connected to an Intranet and/or to the Internet, as shown in FIGURE 3. A device 80 such as a personal computer, programmable logic controller (PLC), weigh scale, barcode scanner or other type of device may be connected to the serial port 50 for providing the printer 10 a data stream

which the printer 10 uses to print tags, labels or the like.

The label generation and communications microprocessor 30 communicates with a user interface 90 which consists of buttons and switches which are disposed mainly on the front panel 100 of the printer 10 (see FIGURE 1). The label generation and communications microprocessor 30 also communicates with a printing control microprocessor 110. The printing control microprocessor 110 is in communication with printer mechanics 120 which are generally conventional and well known in the art, and controls the printer mechanics 120 to print tags, labels or the like depending on information the printing control microprocessor 110 receives from the label generation and communications microprocessor 30.

Preferably, the printing control microprocessor 110 is configured to monitor certain components and aspects of the printer mechanics 120, determine whether there is a warning condition, printer error or other problem, and report to the label generation and communications microprocessor 30. For example, preferably the printing control microprocessor 110 is configured to determine whether the printer 10 has run out of paper, is off or on line, has run out of ribbon, whether the printhead is open or is getting too hot, etc. This type of monitoring is generally well known in the art. The configuration of the label generation



and communications microprocessor 30 and the fact that the printing control microprocessor 110 monitors the printer mechanics 120 and the printer 10 is connected to an Intranet and/or to the Internet (see FIGURE 3) provides that the printer 10 can automatically transmit critical and non-critical printer  
5 information to one or more remote devices such as, as shown in FIGURE 3, to a personal computer 130, 140 connected to an Intranet or to the Internet, or to an Internet-ready pager 150, a PCS phone 160 and/or a PDA 170, over a wireless communication network. This will be described in more detail later herein.

10            Preferably, the label generation and communications microprocessor 30 is configured to be programmed and controlled using a pre-determined programming language (identified as “ZPL” in FIGURE 2). As will be described more fully later herein, preferably the printer 10 is configured such that the printer can be programmed and controlled from a remote  
15 location, such as over an Intranet, the Internet or over a wireless communications network.

             Preferably, the label generation and communications microprocessor 30 includes a web-server (which is generally embedded within the printer’s operation system) which is configured to communicate in Hyper Text  
20 Markup Language (HTML) (identified as “HTML” in FIGURE 2) to

facilitate the display of web pages over an Intranet, the Internet or over a wireless communication network. As will be described more fully later herein, this provides that a person, such as an IT manager, can view printer settings and can program and control the printer 10 from a remote location using a web browser. Preferably, the printer is configured to provide the data in a simple format which does not require that the receiving device support JAVA. As such, the data can be readily processed and displayed by a pager 150, PCS phone 160 or PDA 170 which may not support JAVA.

Preferably, the printer 10 includes a program and corresponding firmware (identified as "ZBI" in FIGURE 2) which is configured to convert a data stream from one format to another, thereby providing that the printer 10 is compatible with a plurality of different data stream formats. Specifically, the label generation and communications microprocessor 30 receives a data stream, for example, through the serial port 50, such as from a personal computer, weigh scale or barcode scanner. The ZBI may then convert the data stream from one format which would otherwise be incompatible with the printer 10 into another format which is compatible with the printer 10. The label generation and communications microprocessor 30 then uses the converted data to format a label, tag or the like, and communicates with the printing control microprocessor 110 which

thereafter controls the printer mechanics 120 in order to print the label, tag or the like in accordance with the format. United States Provisional Application Serial No. 60/162,789 discloses the ZBI in more detail, and this application is hereby incorporated herein in its entirety by reference.

5           As discussed above, preferably the printer 10 is configured such that the printer 10 can interface with a device at a remote location via e-mail or TCP/UDP over an Intranet, the Internet or over a wireless communication network. This will now be described in more detail.

10           As described above, preferably the printer 10 is configured to display web pages over an Intranet, the Internet or over a wireless communication network. Preferably, one of the web pages is configured such that the user can select conditions (such as printer error or warning conditions) of which the user wants to be alerted, and can select how he or she wants to be alerted. Specifically, preferably the web page is configured such that the  
15           user can select a condition and can select e-mail and provide the web site with his or her e-mail address, can select PCS phone and provide the web site with his or her phone number, can select pager and provide the web site with the pager number, or can select to be alerted in some other manner via a corporate local area network (LAN) or wide-area network (WAN).  
20           Thereafter, if the printer 10 (i.e. the printing control microprocessor 110)

detects the condition, the printer 10 alerts the user of the condition via the means chosen (i.e. sends the user an e-mail, calls the person and displays information on the screen of the PCS phone, pages the person and displays information on the screen of the pager, or alerts the person in some manner via the corporate LAN or WAN) (see FIGURE 3). This provides that the user, such as an IT manager, need not pro-actively monitor the printer 10, and the printer 10 will automatically and immediately inform the user of printer errors or warning conditions via the selected communication channel. Preferably, the web page provides that the user can also elect to be alerted that a condition has been cleared (i.e. a warning condition or printer error which has been detected by the printer 10 has been since corrected). This is advantageous because it may prevent the user, such as an IT manager, from spending time trying to correct a problem which has already been corrected, such as by personnel who are on site at the printer 10.

15 Preferably, another web page is configured such that the user can view the printer's configuration.

Preferably, other web pages are configured such that the user can view and modify printer settings, for example, the printer's general setup, serial communications setup, network communications setup, media setup, calibration, as well as view and modify other printer settings. Additionally,

20

preferably the user can direct the web page to have the printer 10 print its settings onto a tag, label or the like for viewing on site. Preferably, the web pages are configured such that the user must enter a password to adjust the printer's settings. With regard to the media setup, preferably the user can specify the media type and sensor type as well as the print method and the print width and maximum length within acceptable ranges.

Preferably, as shown in FIGURE 4, the printer 10 is configured such that a user 180 can upload the printer's settings in a format such as XML, can view and modify the settings using a web browser, and can thereafter download the settings back to the printer 10, or to other printers (10a, 10b, 10c, etc.) in the network to facilitate cloning.

Preferably, a web page of the printer 10 is configured such that the user can view the status of memory in the printer 10 and can view a directory listing of different objects which are stored in and used by the printer 10 (i.e. used by the label generation and communications microprocessor 30 and/or the printing control microprocessor 110). Such listings may include programs which run in the printer's operating system, as well as graphic images, fonts, label formats and programs relating to the ZBI (discussed hereinabove).

Preferably, the printer 10 is configured such that the user can direct the printer to stop or run a program, and can add or modify an existing program, wherein the new or modified program is thereafter downloaded to the printer 10 and the printer 10 becomes effectively re-programmed.

5 Preferably, the web pages are configured such that the user must enter a password to add, run, stop or modify any of the programs. FIGURE 5 illustrates a user controlling (i.e. running or stopping) the ZBI from a remote location as well as uploading the ZBI, modifying the ZBI and downloading the modified ZBI to the printer. Preferably, the printer 10 is  
10 configured to display the ZBI in the form of a web page at a remote location and provides that a user can direct the ZBI to open TCP/UDP or e-mail ports to the Internet or an intranet to send messages to or from the printer for communicating with other systems on the Internet or intranet.

With regard to label formats, as shown in FIGURE 6, preferably the  
15 printer 10 is configured such that a user can upload (see FIGURE 3) label formats which are stored in the printer 10 which the printer 10 uses to print labels, and can thereafter view and modify the format. Preferably, the printer 10 is configured such that after modifying the format, the user can direct the web page (i.e. the printer) to display how the label would look if it  
20 were actually printed by the printer (i.e. a label preview), or can direct the

printer to actually print the label. If the label does not look as desired, the user can further modify the format and again view a label preview or print the label until the label looks as desired. Then, the user can direct the web site to download the modified, finalized format to the printer 10 (or to one or more other printers) which thereafter uses the modified format to print labels, tags or the like. Preferably, the printer 10 and web pages are also configured such that the user can format a new label and can download the new label format to the printer for use.

Although the printer 10 is preferably configured such that web pages can be viewed using a web browser, the printer 10 may also be configured to communicate over an Intranet or the Internet (see FIGURE 3) with a computer which is running a utility program which is specifically directed at monitoring the printer 10 and provides for the centralized management of a plurality of printers in a network.

As discussed above and as shown in FIGURE 7, desirably the printer 10 is configured such that the printer 10 can process data in a stand-alone application, such as by receiving data through the serial port 50 (see FIGURE 2) and acting on the information by printing tags, labels or the like, and can thereafter, without solicitation from a host 190, upload the processed data to the host 190 when the host is ready to receive the data.

Preferably, as shown in FIGURE 8, the printer is configured such that a user can download barcode rendering algorithms to the printer for the printer to use in interpreting data streams and generating a barcode.

Preferably, the printer and web pages are configured such that a user can

5 download barcode rendering algorithms, such as from a printer manufacturer's web site, and can thereafter download the barcode rendering algorithms to the printer. As such, it is easy for the user to keep the printer updated with regard to new or updated barcode standards, and can do so from a remote location. Preferably, the printer is configured such that the  
10 barcode rendering algorithms can be downloaded to the printer in the form of executable code, and the printer can execute the code to print a barcode from a stream of data, which is possibly received by the printer through the serial port 50 (see FIGURE 2).

As set forth above, United States Provisional Application No.  
15 60/162,789 has been incorporated herein by reference. United States Provisional Application No. 60/149,966 is also hereby incorporated in its entirety by reference in that the application contains additional disclosure about the present invention.



While an embodiment of the present invention is shown and described, it is envisioned that those skilled in the art may devise various modifications without departing from the spirit and scope of the foregoing description.

58952-1  
TREXLER, BUSHNELL, GIANGIORGI & BLACKSTONE, LTD.  
Page 24

What is claimed is:

1. A printer which is configured to print labels, tags or the like,  
said printer comprising: a housing; and electronics in the housing  
configured to determine a condition of the printer, and thereafter  
5 automatically transmit data corresponding to the condition to a remote  
location over at least one of an Intranet, the Internet and a wireless  
communication network.

2. A printer as recited in claim 1, said printer configured to  
10 transmit the data via e-mail.

3. A printer as recited in claim 1, said printer configured to  
transmit the data along the wireless communication network to at least one  
of an Internet-ready paging device, a Personal Communications Service  
15 (PCS) phone and a Personal Digital Assistant (PDA).

4. A printer as recited in claim 1, said printer configured to  
process data and upload the processed data to a host when the host is ready  
to receive the data, said printer configured to continue operating when the  
20 host is not ready to receive the data.

5. A printer as recited in claim 1, said printer including a microprocessor and a port, said microprocessor in communication with said port and configured to transmit the data through said port to at least one of the Intranet, the Internet and wireless communication network.

5

6. A printer as recited in claim 1, said printer configured to determine whether a condition of the printer has been cleared, and thereafter automatically transmit a message to a remote user that the condition has been cleared.

10

7. A printer which is configured to print labels, tags or the like, said printer comprising: a housing; and electronics in the housing configured to provide that a label format stored in the printer is at least one of viewable and modifiable at a remote location over at least one of an Intranet, the Internet and a wireless communication network.

15

8. A printer as recited in claim 7, said printer configured to provide that the label format is at least one of viewable and modifiable via at least one of a personal computer connected to the Internet, a Personal Communications Service (PCS) phone and a Personal Digital Assistant (PDA).

9. A printer as recited in claim 7, said printer configured to provide that the label format is at least one of viewable and modifiable using a web browser on a personal computer connected to at least one of the Intranet and the Internet.

10. A printer as recited in claim 7, said printer including a microprocessor and a port, said microprocessor in communication with said port and configured to transmit label format data through said port to at least one of the Intranet, the Internet and wireless communication network.

11. A printer which is configured to print labels, tags or the like,  
said printer comprising: a housing; and electronics in the housing  
configured to provide that the printer is programmable and controllable  
from a remote location over at least one of an Intranet, the Internet and a  
5 wireless communication network.

12. A printer as recited in claim 11, said printer having an  
operating system and at least one program stored therein which operates  
within the operating system, said printer configured to provide that the  
10 program is at least one of controllable, modifiable and viewable via a  
personal computer connected to at least one of the Intranet and the Internet.

13. A printer as recited in claim 11, said printer configured to  
provide that the printer is programmable and controllable via at least one of  
15 a personal computer connected to the Internet, a Personal Communications  
Service (PCS) phone and a Personal Digital Assistant (PDA).

14. A printer as recited in claim 11, said printer configured to provide that the printer is programmable and controllable using a web browser on a personal computer connected to at least one of the Intranet and the Internet.

5

15. A printer which is configured to print labels, tags or the like, said printer comprising: a housing; and electronics in the housing configured to provide that the printer receives a barcode rendering algorithm through a port.

10

16. A printer as recited in claim 15, said printer configured to receive said barcode rendering algorithm as executable code and configured to thereafter execute the code to print a barcode.

15

17. A printer as recited in claim 15, wherein said printer is configured to receive a barcode rendering algorithm from a remote location over at least one of an Intranet, the Internet and a wireless communication network.

5

18. A printer which is configured to print labels, tags or the like, said printer comprising: a housing; and electronics in the housing configured to provide that settings of the printer are at least one of viewable and modifiable from a remote location over at least one of an Intranet, the Internet and a wireless communication network.

10

19. A printer as recited in claim 18, said printer configured to provide that settings of the printer are at least one of viewable and modifiable using at least one of a Personal Communications Service (PCS) phone, an Internet-ready pager and a Personal Digital Assistant (PDA).

15

20. A printer as recited in claim 18, said printer configured to provide that the printer is programmable and controllable using a web browser on a personal computer connected to at least one of the Intranet and the Internet.

20

21. A printer as recited in claim 18, said printer configured to transmit data in XML format over the Internet, said data corresponding to the settings of the printer, said data viewable and modifiable using a web browser on a personal computer connected to at least one of the Intranet and the Internet.

22. A method of making it easy for a user to keep a printer up-to-date with regard to barcode rendering algorithms stored therein, said method comprising:

10 providing the user with the printer which is configured to print labels, tags or the like, said printer including a housing, and including electronics in the housing which is configured to provide that the printer can receive a barcode rendering algorithm over at least one of an Intranet, the Internet and a wireless communication network;

15 posting a plurality of barcode rendering algorithms on the Internet; and

allowing the user to download the barcode rendering algorithms and forward the barcode rendering algorithms to the printer over at least one of the Intranet, the Internet and wireless communication network.

20



23. A method of cloning a plurality of printers, comprising:  
uploading from one printer data corresponding to settings of the  
printer;

5 downloading the data to a plurality of printers to clone the printers,  
wherein settings of the printers are the same.

24. A method as recited in claim 23, wherein the data is in XML  
format.

## **Abstract**

A printer which is configured to automatically transmit data, such as critical and non-critical printer data, and route that data through at least one of a plurality of communication channels and services, such as via e-mail or mobile wireless equipment (e.g. an Internet-ready pager, a Personal Communications Service (PCS) phone or a wireless Personal Digital Assistant (PDA)). Preferably, the printer is configured such that it can be programmed and controlled from a remote location. Preferably, the printer is configured such that new label formats can be added from a remote location, and label formats stored in the printer can be viewed and modified from a remote location. Preferably, the printer is also configured such that barcode rendering algorithms can be downloaded to the printer from a remote location, and such that printer settings can be viewed and modified from a remote location, and thereafter can be downloaded to the printer and/or to other printers in a network to facilitate cloning.

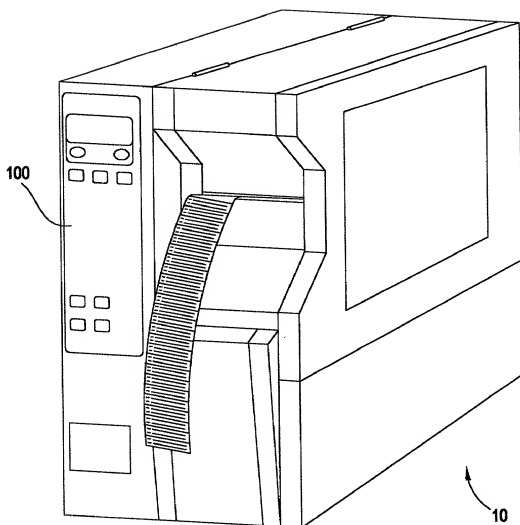
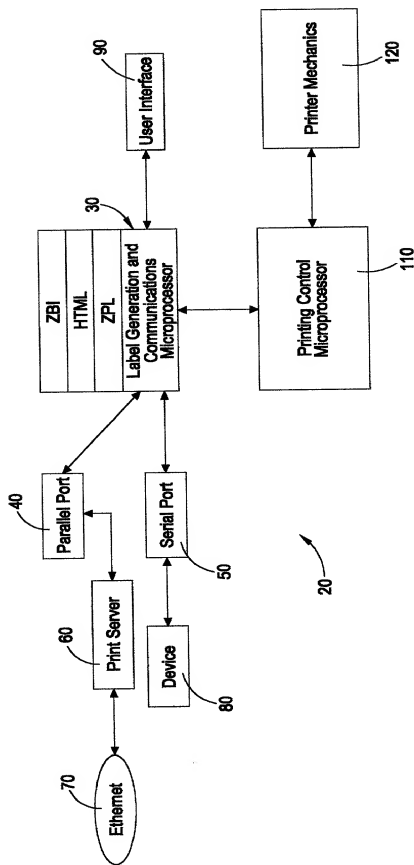


FIG. 1



**FIG. 2**

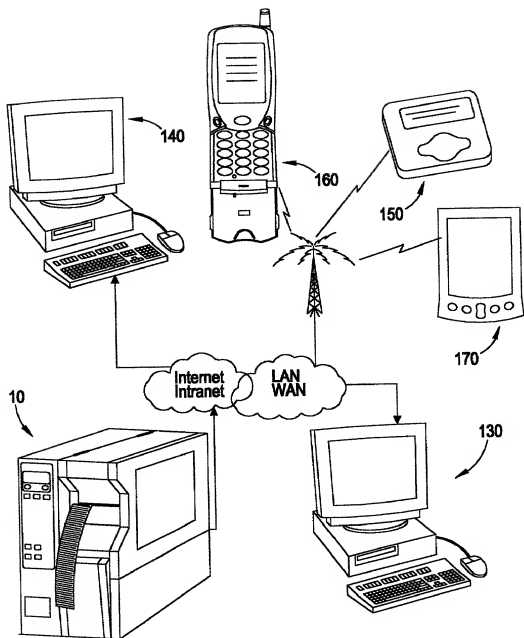


FIG. 3

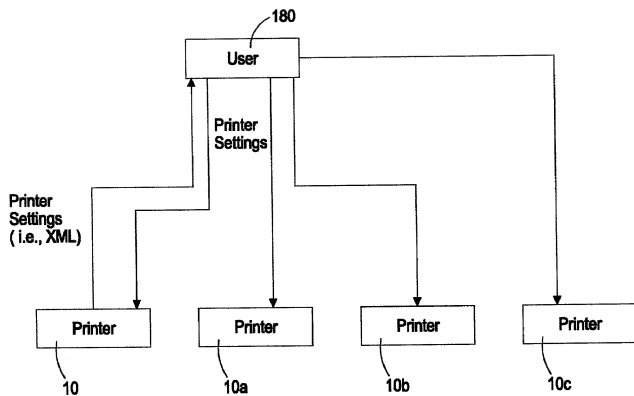


FIG. 4

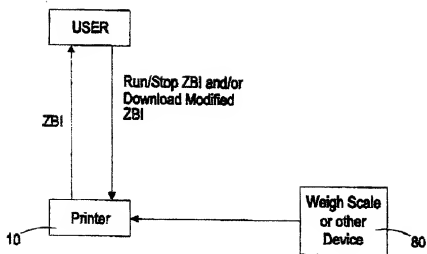


FIG. 5

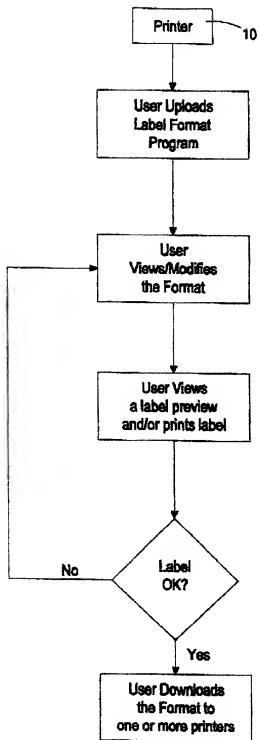


FIG. 6



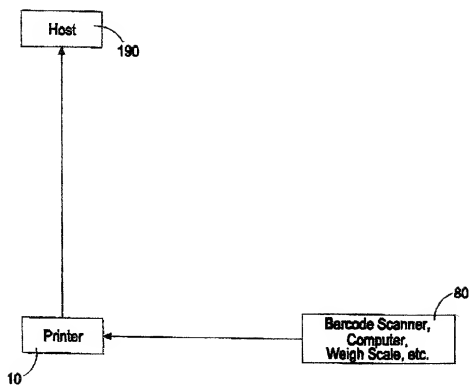


FIG. 7

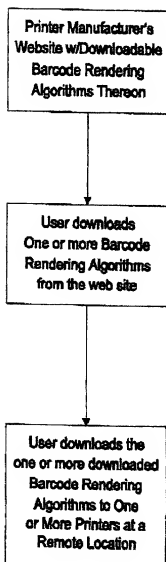


FIG. 8

# DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION

1085/37870

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled: \_\_\_\_\_,

## PRINTER FOR PRINTING LABELS, TAGS OR THE LIKE

the specification of which

(check one) ☒ is attached hereto.  
☐ was filed on \_\_\_\_\_ as Application Serial No. \_\_\_\_\_ and  
 was amended on \_\_\_\_\_ (if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, §1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, §119(a)-(d) of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

### Prior Foreign Application(s)

### Priority Claimed

(Number) _____	(Country) _____	(Day/Month/Year Filed) _____	<input type="checkbox"/> Yes	<input type="checkbox"/> No
(Number) _____	(Country) _____	(Day/Month/Year Filed) _____	<input type="checkbox"/> Yes	<input type="checkbox"/> No

### Prior Provisional Application(s)

I hereby claim the benefit under Title 35, United States Code, §119(e) of any United States provisional application(s) listed below.

60/149,966 (Application Number)	8/20/99 (Filing Date)
60/162,789 (Application Number)	10/29/99 (Filing Date)

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below; insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, §1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

(Application Serial No.) _____	(Filing Date) _____	(Status: patented, pending, abandoned) _____
(Application Serial No.) _____	(Filing Date) _____	(Status: patented, pending, abandoned) _____

**POWER OF ATTORNEY:** As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith: Richard Bushnell, Reg. 16,943; Richard A. Giangiori, Reg. 24,284; Raiford A. Blackstone, Jr., Reg. 25,156; David J. Marr, Reg. 32,915; Grant H. Peters, Reg. 35,977; Linda L. Palomar, Reg. 37,903; and James R. Foley, Reg. 39,979

SEND CORRESPONDENCE TO:

**TREXLER, BUSHNELL, GIANGIORGI & BLACKSTONE, LTD.  
 105 W. ADAMS STREET, CHICAGO, IL 60603**

DIRECT TELEPHONE CALLS TO:

**(312) 704-1890 Raiford A. Blackstone, Jr., Reg. No. 25,156**

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of sole or first inventor: **Jeffrey R. Kaufman**  
 Inventor's signature: \_\_\_\_\_ Date: \_\_\_\_\_  
 Residence: **Vernon Hills, Illinois 60061**  
 Citizenship: **U.S.A.**  
 Post Office Address: **465 Stevenson Place, Vernon Hills, Illinois 60061**

(Supply similar information and signature for second and subsequent joint inventors.)

Full name of second inventor Victor Salmons  
Inventor's signature \_\_\_\_\_ Date \_\_\_\_\_  
Residence Gurnee, Illinois 60031  
Citizenship U.S.A.  
Post Office Address 1570 Belle Plaine, Gurnee, Illinois 60031

Full name of third inventor Steven P. King  
Inventor's signature \_\_\_\_\_ Date \_\_\_\_\_  
Residence Palatine, Illinois 60067  
Citizenship U.S.A.  
Post Office Address 121 W. King George Court, Palatine, Illinois 60067

Full name of fourth inventor Bruce N. Alleshouse  
Inventor's signature \_\_\_\_\_ Date \_\_\_\_\_  
Residence Wilmette, Illinois 60091  
Citizenship U.S.A.  
Post Office Address 1426 Forest Avenue, Wilmette, Illinois 60091

Full name of fifth inventor Bret M. Anno  
Inventor's signature \_\_\_\_\_ Date \_\_\_\_\_  
Residence Mundelein, Illinois 60060  
Citizenship U.S.A.  
Post Office Address 226 Chandler Drive, Mundelein, Illinois 60060

1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60  
61  
62  
63  
64  
65  
66  
67  
68  
69  
70  
71  
72  
73  
74  
75  
76  
77  
78  
79  
80  
81  
82  
83  
84  
85  
86  
87  
88  
89  
90  
91  
92  
93  
94  
95  
96  
97  
98  
99  
100